


Beacon Series „K“

Steady beacon WLK
 LED steady beacon WLK
 LED flashing beacon WLK
 Strobe beacon FLK




Features

- Ø 60 mm
- WLK** steady beacon (bulb 7 W)
 - LED steady beacon (LED bulb LLL)
 - LED flashing beacon (LED bulb LLB)
- FLK** strobe beacon
- FLK lens colours: amber, red, yellow
- WLK – easy bulb change without tools (bayonet)



Technical data

Type	WLK	FLK
Housing, colour	ABS, grey RAL 7035 or black RAL 9005	
Lens	polycarbonate	
Lens colour	amber, red, clear, blue, green, yellow	amber, red, yellow
Cable entry	6-9 mm	
Mounting	horizontal, vertical	
Duty cycle factor	100 %	
Terminals	1,5 mm ²	2,5 mm ²
Light source	bulb/BA15d	xenon tube
Wattage	7 W (12 V: 5 W)	1 J
Life time (light source)		~ 10 mio. flashes
Strobe frequency		~ 1,4 Hz
Weight	please refer to general weight list	

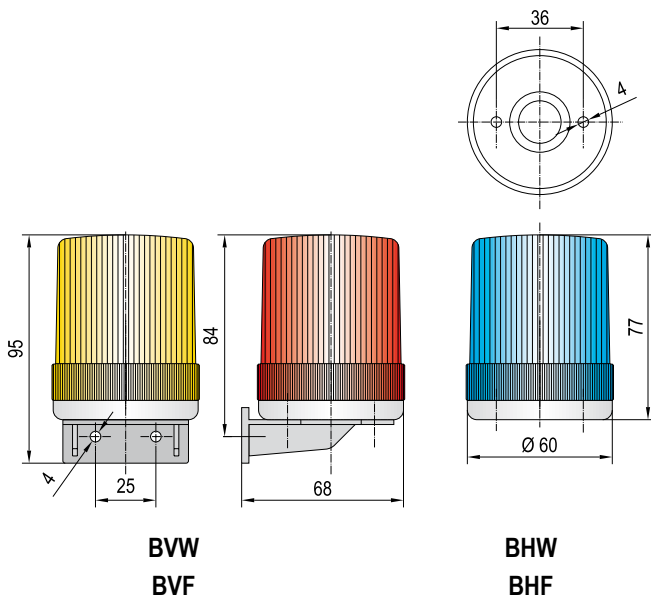

Colour code for lens		C	
1	amber	5	blue
2	red	6	green
4	clear	7	yellow



WLK



GL

bulb 7 W



LLL



LLB

LED bulbs,
steady light (LLL) – flashing light (LLB)



BHW



BVW

FLK



terminal

sealed electronics



BHF



BVF



Order data

Type	Denomination	Light source		Nominal voltage (V)	Order No.	
		Bulb	LED blub		Housing grey	Housing black
Steady/flashing beacon						
WLK	Steady beacon	GL	LLL	bis 250 V AC/DC	820 00C 900	
	Flashing beacon	---	LLB			
BHW	Base for horizontal mounting				820 520 900	
BVW	Base for vertical mounting				820 530 900	



Accessories

Type	Nominal voltage	Order No.	Type	Nominal voltage	Order No.	Type	Nominal voltage	Order No.
Incandescent bulb			LED bulb BA15d			LED bulb BA15d		
					steady light			flashing light
GL01	12 V, 5 W	890 010 904	LLL	12 V AC/DC	893 00C 404	LLB	12 V AC/DC	893 01C 404
GL02	24 V, 6,5 W	890 010 905		24 V AC/DC	893 00C 405		24 V AC/DC	893 01C 405
GL03	48 V, 5 W	890 010 908		48 V AC/DC	893 00C 408		48 V AC/DC	893 01C 408
GL04	60 V, 7 W	890 010 909		---	---		---	---
GL05	110/120 V, 7 W	890 010 910		110/120 V AC	893 00C 310		110/120 V AC	893 01C 310
GL06	230/240 V, 6 W	890 010 913		230/240 V AC	893 00C 313		230/240 V AC	893 01C 313



Order data

Type	Denomination	Light source	Nominal voltage (V)	Order No.		Nominal current (A)
				Housing grey	Housing black	
Flashing beacon						
FLK	Flashing beacon	1 J Xenon tube (built-in)	12-24 V AC/DC	840 00C 405		12 V: 0,120 24 V: 0,095
			110/120 V AC	840 00C 310		0,021
			230/240 V AC	840 00C 313		0,015
BHF	Base for horizontal mounting				840 501 900	
BVF	Base for vertical mounting				840 502 900	

NOTE: only available in amber, red and yellow