
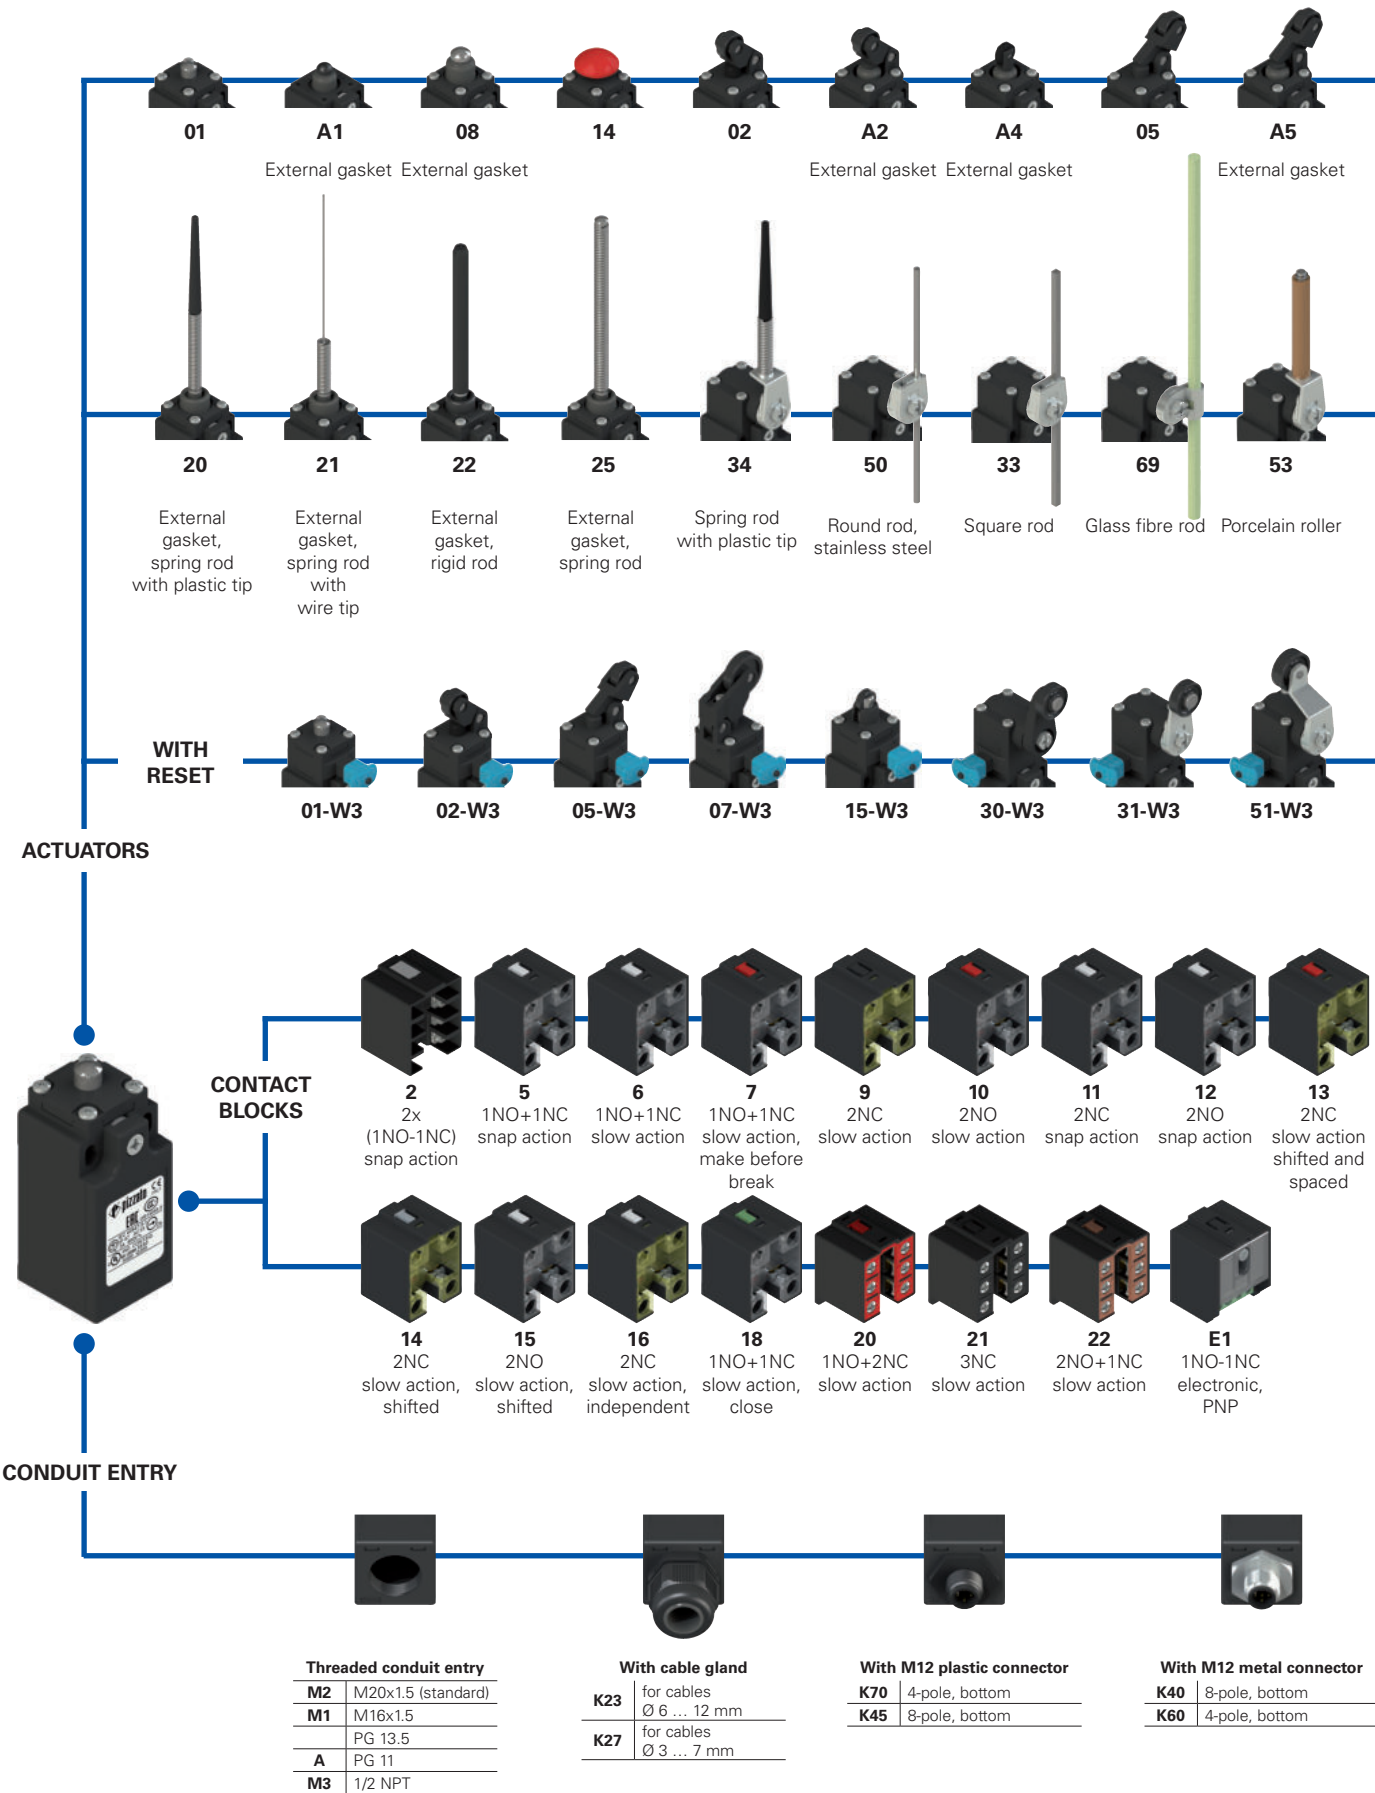


Selection diagram

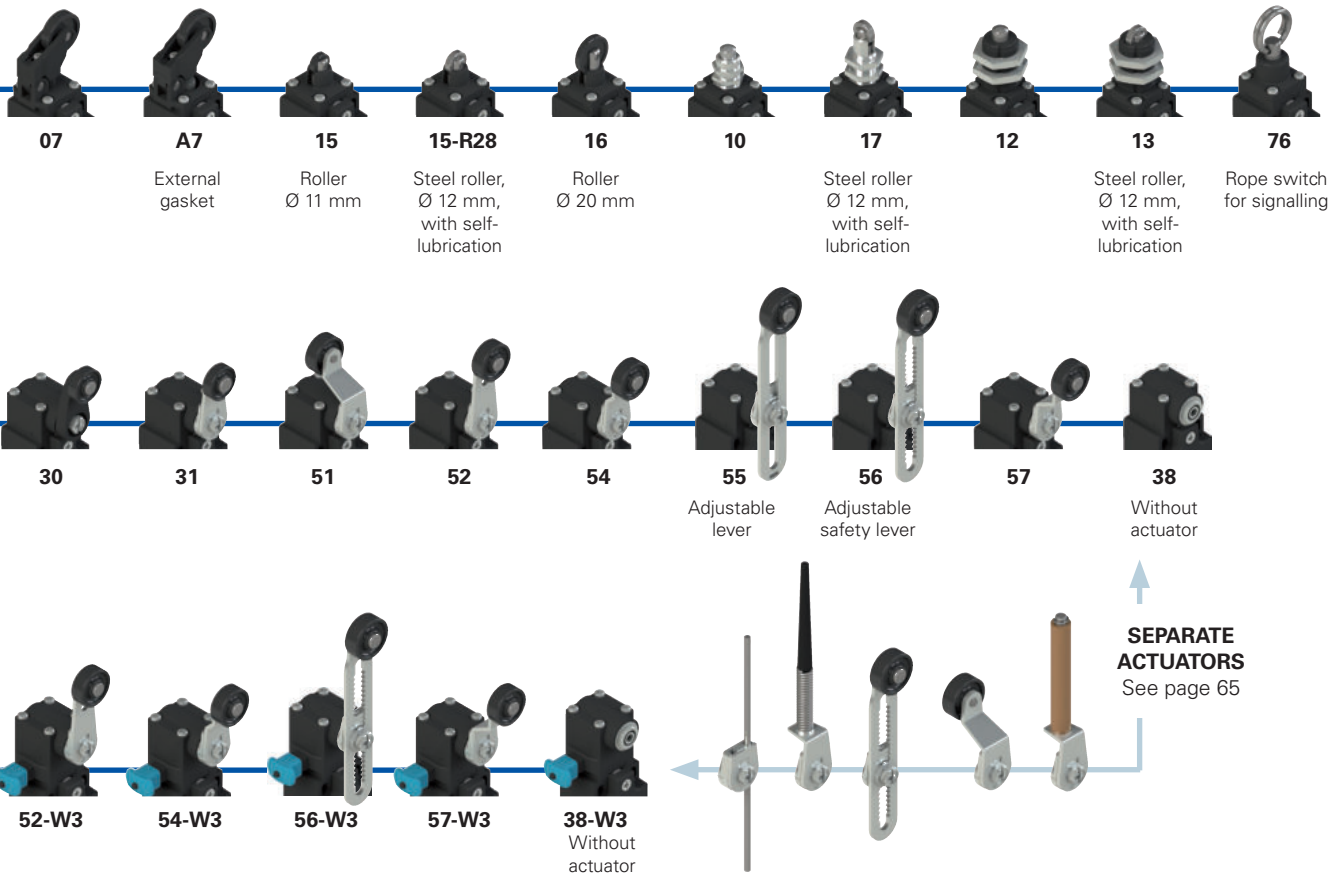

● Product options
→ Sold separately as accessory


Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options options
FR 502-W3XGM2K70R23T6

Ambient temperature

-25°C ... +80°C (standard)
T6 -40°C ... +80°C

Housing	
FR	technopolymer, one conduit entry

Contact block	
5	1NO+1NC, snap action
6	1NO+1NC, slow action
7	1NO+1NC, slow action, make before break
...	...

Actuators	
01	short plunger
02	roller lever
05	angled lever with roller
...	...

Reset	
	without reset (standard)
W3	simultaneous reset
W4	simultaneous reset, increased force

External metallic parts	
	zinc-plated steel (standard)
X	stainless steel

Pre-installed cable glands or connectors

	no cable gland or connector (standard)
K23	cable gland for cables Ø 6 ... 12 mm
K70	M12 plastic connector, 4-pole

For the complete list of possible combinations please contact our technical department.

Threaded conduit entry

M2	M20x1.5 (standard)
M1	M16x1.5
	PG 13.5
A	PG 11
M3	1/2 NPT

Contact type

	silver contacts (standard)
G	silver contacts, 1 µm gold coating
G1	silver contacts, 2.5 µm gold coating (not for contact block 2, 20, 21, 22)

Rollers

	standard roller
R28	Steel, with self-lubrication, Ø 12 mm (for actuators A4, 15)
R44	316L stainless steel, Ø 12 mm (for actuators A4, 13, 15, 17)
R23	Steel, with self-lubrication, Ø 14 mm (for actuators A2, 02, A5, 05, 30, 31, 51, 52, 54, 55, 56, 57)
R43	316L stainless steel, Ø 14 mm (for actuators A2, 02, A5, 05, 30, 31, 51, 52, 54, 55, 56, 57)
R24	Steel, with self-lubrication, Ø 20 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R41	316L stainless steel, Ø 20 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R36	Steel, with self-lubrication, Ø 16 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R25	technopolymer, Ø 35 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R5	rubber, Ø 40 mm (for actuators 30, 31, 51, 52, 54, 55, 56, 57)
R26	rubber, Ø 50 mm (for actuators 51, 52, 54, 55, 56, 57)
R27	rubber, protruding, Ø 50 mm (for actuators 55, 56)



Main features

- Technopolymer housing, one conduit entry
- Protection degree IP67
- 17 contact blocks available
- 48 actuators available
- Versions with external parts in stainless steel
- Versions with M12 connector
- Versions with gold-plated silver contacts

Quality marks:



IMQ approval:	EG610
UL approval:	E131787
CCC approval:	2021000305000101
EAC approval:	RU C-IT.YT03.B.00035/19

Installation for safety applications:

Use only switches marked with the \ominus symbol beside the product code. Always connect the safety circuit to the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as required by **EN ISO 14119, paragraph 5.4** for specific interlock applications and **EN ISO 13849-2 tables D3** (well-tried components) and **D.8** (fault exclusions) for safety applications in general. Actuate the switch **at least up to the positive opening travel** shown in the travel diagrams on page 232. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 227 to 242.

Technical data

Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: \square

One threaded conduit entry:	M20x1.5 (standard)
Protection degree acc. to EN 60529:	IP67 with cable gland of equal or higher protection degree

General data

Ambient temperature:	-25°C ... +80°C (standard) -40°C ... +80°C (T6 option)
Max. actuation frequency:	3600 operating cycles/hour
Mechanical endurance:	20 million operating cycles
Mounting position:	any
Safety parameter B_{10D} :	40,000,000 for NC contacts
Mechanical interlock, not coded:	type 1 acc. to EN ISO 14119
Tightening torques for installation:	see page 231
Wire cross-sections and wire stripping lengths:	see page 249

In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, EN 60947-1, EN 50047, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 60529, EN IEC 63000, UL 508, CSA C22.2 No. 14.

Approvals:

IEC 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5.

Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

Electrical data

Utilization category

without connector	Thermal current (I_{th}):	10 A	Alternating current: AC15 (50÷60 Hz)			
	Rated insulation voltage (U):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 2, 11, 12, 20, 21, 22)	Ue (V)	250	400	500
	Rated impulse withstand voltage (U_{imp}):	6 kV 4 kV (contact blocks 20, 21, 22)	Ie (A)	6	4	1
	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	Direct current: DC13			
	Protection against short circuits:	type aM fuse 10 A 500 V	Ue (V)	24	125	250
Pollution degree:	3	Ie (A)	3	0.55	0.3	

with M12 connector, 4-pole	Thermal current (I_{th}):	4 A	Alternating current: AC15 (50÷60 Hz)			
	Rated insulation voltage (U):	250 Vac 300 Vdc	Ue (V)	24	120	250
	Protection against short circuits:	type gG fuse 4 A 500 V	Ie (A)	4	4	4
	Pollution degree:	3	Direct current: DC13			
			Ue (V)	24	125	250
		Ie (A)	3	0.55	0.3	

with M12 connector, 8-pole	Thermal current (I_{th}):	2 A	Alternating current: AC15 (50÷60 Hz)			
	Rated insulation voltage (U):	30 Vac 36 Vdc	Ue (V)	24		
	Protection against short circuits:	type gG fuse 2 A 500 V	Ie (A)	2		
	Pollution degree:	3	Direct current: DC13			
			Ue (V)	24		
		Ie (A)	2			



Features approved by IMQ

Rated insulation voltage (Ui): 500 Vac
 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 37, 33, 34)
 Conventional free air thermal current (Ith): 10 A
 Protection against short circuits: type aM fuse 10 A 500 V
 Rated impulse withstand voltage (U_{imp}): 6 kV
 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)
 Protection degree of the housing: IP67
 MV terminals (screw terminals)
 Pollution degree: 3
 Utilization category: AC15
 Operating voltage (U_e): 400 Vac (50 Hz)
 Operating current (I_e): 3 A
 Forms of the contact element: Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.
 Positive opening of contacts on contact blocks 5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.
 In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.


Please contact our technical department for the list of approved products.

Features approved by UL


Electrical Ratings: Q300 pilot duty (69 VA, 125-250 V dc)
 A600 pilot duty (720 VA, 120-600 V ac)
 Environmental Ratings: Types 1, 4X, 12, 13
 For all contact blocks except 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 12, 14 AWG. Tightening torque for terminal screws of 7.1 lb in (0.8 Nm).
 For contact blocks 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 14 AWG. Tightening torque for terminal screws of 12 lb in (1.4 Nm).
 The hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.

Wiring diagram for M12 connectors

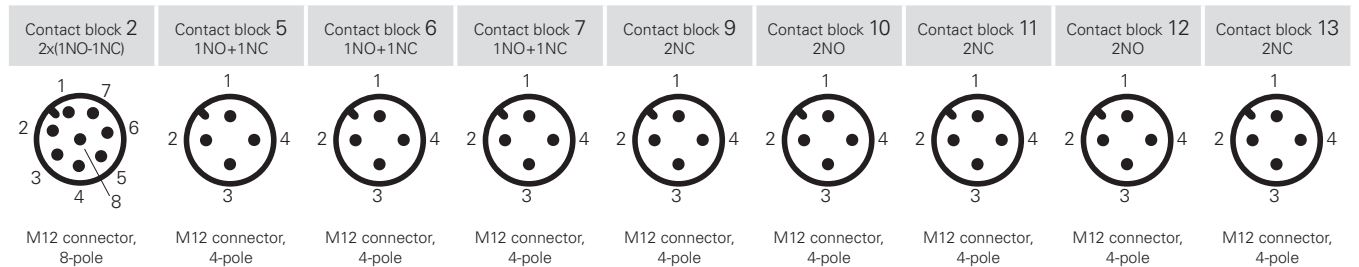


Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
NO	3-4	NC	1-2	NC	1-2	NC	1-2	NC	1-2	NO	1-2	NC	1-2	NC (1°)	1-2
NC	5-6	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NO	3-4	NC	3-4	NO	3-4
NC	7-8														
NO	1-2														

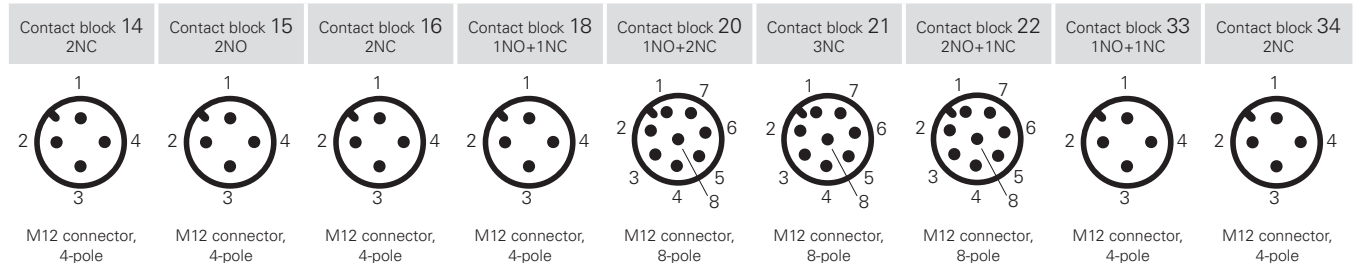

Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
NC (1°)	1-2	NO (1°)	1-2	NC, lever to the right	1-2	NC	1-2	NC	3-4	NC	3-4	NC	3-4	NC	1-2
NC (2°)	3-4	NO (2°)	3-4	NC, lever to the left	3-4	NO	3-4	NC	5-6	NO	5-6	NO	5-6	NO	3-4
									7-8	NC	7-8	NO	7-8		

Contact block E1
PNP



M12 connector, 4-pole

Contacts	Pin no.
+	1
-	3
NC	2
NO	4

FR series position switches

Contact type	External gasket		With steel roller with self-lubrication or 316L stainless steel on request		External gasket	
	With \varnothing 12 mm steel roller with self-lubrication or 316L stainless steel on request		With steel roller with self-lubrication or 316L stainless steel on request		With steel roller with self-lubrication or 316L stainless steel on request	
<ul style="list-style-type: none"> R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close ⚡ = electronic, PNP 						
<p>Max. speed</p> <p>Actuating force</p> <p>Travel diagrams</p>	<p>page 231 - type 4</p> <p>8 N (25 N \ominus)</p> <p>page 232 - group 1</p>		<p>page 231 - type 4</p> <p>6 N (25 N \ominus)</p> <p>page 232 - group 1</p>		<p>page 231 - type 3</p> <p>6 N (25 N \ominus)</p> <p>page 232 - group 2</p>	
<p>2 R FR 201-M2 2x(1NO-1NC)</p> <p>5 R FR 501-M2 \oplus 1NO+1NC</p> <p>6 L FR 601-M2 \oplus 1NO+1NC</p> <p>7 LO FR 701-M2 \oplus 1NO+1NC</p> <p>9 L FR 901-M2 \oplus 2NC</p> <p>10 L FR 1001-M2 2NO</p> <p>11 R FR 1101-M2 \oplus 2NC</p> <p>12 R FR 1201-M2 2NO</p> <p>13 LV FR 1301-M2 \oplus 2NC</p> <p>14 LS FR 1401-M2 \oplus 2NC</p> <p>15 LS FR 1501-M2 2NO</p> <p>18 LA FR 1801-M2 \oplus 1NO+1NC</p> <p>20 L FR 2001-M2 \oplus 1NO+2NC</p> <p>21 L FR 2101-M2 \oplus 3NC</p> <p>22 L FR 2201-M2 \oplus 2NO+1NC</p> <p>E1 ⚡ FR E101-M2 1NO-1NC</p>	<p>/</p> <p>FR 5A1-M2 \oplus 1NO+1NC</p> <p>FR 6A1-M2 \oplus 1NO+1NC</p> <p>FR 7A1-M2 \oplus 1NO+1NC</p> <p>FR 9A1-M2 \oplus 2NC</p> <p>FR 10A1-M2 2NO</p> <p>FR 11A1-M2 \oplus 2NC</p> <p>FR 12A1-M2 2NO</p> <p>FR 13A1-M2 \oplus 2NC</p> <p>FR 14A1-M2 \oplus 2NC</p> <p>FR 15A1-M2 2NO</p> <p>FR 18A1-M2 \oplus 1NO+1NC</p> <p>FR 20A1-M2 \oplus 1NO+2NC</p> <p>FR 21A1-M2 \oplus 3NC</p> <p>FR 22A1-M2 \oplus 2NO+1NC</p> <p>FR E1A1-M2 1NO-1NC</p>		<p>FR 202-M2 2x(1NO-1NC)</p> <p>FR 502-M2 \oplus 1NO+1NC</p> <p>FR 602-M2 \oplus 1NO+1NC</p> <p>FR 702-M2 \oplus 1NO+1NC</p> <p>FR 902-M2 \oplus 2NC</p> <p>FR 1002-M2 2NO</p> <p>FR 1102-M2 \oplus 2NC</p> <p>FR 1202-M2 2NO</p> <p>FR 1302-M2 \oplus 2NC</p> <p>FR 1402-M2 \oplus 2NC</p> <p>FR 1502-M2 2NO</p> <p>FR 1802-M2 \oplus 1NO+1NC</p> <p>FR 2002-M2 \oplus 1NO+2NC</p> <p>FR 2102-M2 \oplus 3NC</p> <p>FR 2202-M2 \oplus 2NO+1NC</p> <p>FR E102-M2 1NO-1NC</p>		<p>FR 2A2-M2 2x(1NO-1NC)</p> <p>FR 5A2-M2 \oplus 1NO+1NC</p> <p>FR 6A2-M2 \oplus 1NO+1NC</p> <p>FR 7A2-M2 \oplus 1NO+1NC</p> <p>FR 9A2-M2 \oplus 2NC</p> <p>FR 10A2-M2 2NO</p> <p>FR 11A2-M2 \oplus 2NC</p> <p>FR 12A2-M2 2NO</p> <p>FR 13A2-M2 \oplus 2NC</p> <p>FR 14A2-M2 \oplus 2NC</p> <p>FR 15A2-M2 2NO</p> <p>FR 18A2-M2 \oplus 1NO+1NC</p> <p>FR 20A2-M2 \oplus 1NO+2NC</p> <p>FR 21A2-M2 \oplus 3NC</p> <p>FR 22A2-M2 \oplus 2NO+1NC</p> <p>FR E1A2-M2 1NO-1NC</p>	

Contact type	External gasket		With steel roller with self-lubrication or 316L stainless steel on request		External gasket	
	With \varnothing 12 mm steel roller with self-lubrication or 316L stainless steel on request		With steel roller with self-lubrication or 316L stainless steel on request		With steel roller with self-lubrication or 316L stainless steel on request	
<ul style="list-style-type: none"> R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close ⚡ = electronic, PNP 						
<p>Max. speed</p> <p>Actuating force</p> <p>Travel diagrams</p>	<p>page 231 - type 5</p> <p>6 N (25 N \ominus)</p> <p>page 232 - group 1</p>		<p>page 231 - type 3</p> <p>6 N (25 N \ominus)</p> <p>page 232 - group 2</p>		<p>page 231 - type 3</p> <p>4.3 N (25 N \ominus)</p> <p>page 232 - group 2</p>	
<p>2 R FR 2A4-M2 2x(1NO-1NC)</p> <p>5 R FR 5A4-M2 \oplus 1NO+1NC</p> <p>6 L FR 6A4-M2 \oplus 1NO+1NC</p> <p>7 LO FR 7A4-M2 \oplus 1NO+1NC</p> <p>9 L FR 9A4-M2 \oplus 2NC</p> <p>10 L FR 10A4-M2 2NO</p> <p>11 R FR 11A4-M2 \oplus 2NC</p> <p>12 R FR 12A4-M2 2NO</p> <p>13 LV FR 13A4-M2 \oplus 2NC</p> <p>14 LS FR 14A4-M2 \oplus 2NC</p> <p>15 LS FR 15A4-M2 2NO</p> <p>18 LA FR 18A4-M2 \oplus 1NO+1NC</p> <p>20 L FR 20A4-M2 \oplus 1NO+2NC</p> <p>21 L FR 21A4-M2 \oplus 3NC</p> <p>22 L FR 22A4-M2 \oplus 2NO+1NC</p> <p>E1 ⚡ FR E1A4-M2 1NO-1NC</p>	<p>FR 205-M2 2x(1NO-1NC)</p> <p>FR 505-M2 \oplus 1NO+1NC</p> <p>FR 605-M2 \oplus 1NO+1NC</p> <p>FR 705-M2 \oplus 1NO+1NC</p> <p>FR 905-M2 \oplus 2NC</p> <p>FR 1005-M2 2NO</p> <p>FR 1105-M2 \oplus 2NC</p> <p>FR 1205-M2 2NO</p> <p>FR 1305-M2 \oplus 2NC</p> <p>FR 1405-M2 \oplus 2NC</p> <p>FR 1505-M2 2NO</p> <p>FR 1805-M2 \oplus 1NO+1NC</p> <p>FR 2005-M2 \oplus 1NO+2NC</p> <p>FR 2105-M2 \oplus 3NC</p> <p>FR 2205-M2 \oplus 2NO+1NC</p> <p>FR E105-M2 1NO-1NC</p>		<p>FR 2A5-M2 2x(1NO-1NC)</p> <p>FR 5A5-M2 \oplus 1NO+1NC</p> <p>FR 6A5-M2 \oplus 1NO+1NC</p> <p>FR 7A5-M2 \oplus 1NO+1NC</p> <p>FR 9A5-M2 \oplus 2NC</p> <p>FR 10A5-M2 2NO</p> <p>FR 11A5-M2 \oplus 2NC</p> <p>FR 12A5-M2 2NO</p> <p>FR 13A5-M2 \oplus 2NC</p> <p>FR 14A5-M2 \oplus 2NC</p> <p>FR 15A5-M2 2NO</p> <p>FR 18A5-M2 \oplus 1NO+1NC</p> <p>FR 20A5-M2 \oplus 1NO+2NC</p> <p>FR 21A5-M2 \oplus 3NC</p> <p>FR 22A5-M2 \oplus 2NO+1NC</p> <p>FR E1A5-M2 1NO-1NC</p>		<p>FR 207-M2 2x(1NO-1NC)</p> <p>FR 507-M2 \oplus 1NO+1NC</p> <p>FR 607-M2 \oplus 1NO+1NC</p> <p>FR 707-M2 \oplus 1NO+1NC</p> <p>FR 907-M2 \oplus 2NC</p> <p>FR 1007-M2 2NO</p> <p>FR 1107-M2 \oplus 2NC</p> <p>FR 1207-M2 2NO</p> <p>FR 1307-M2 \oplus 2NC</p> <p>FR 1407-M2 \oplus 2NC</p> <p>FR 1507-M2 2NO</p> <p>FR 1807-M2 \oplus 1NO+1NC</p> <p>FR 2007-M2 \oplus 1NO+2NC</p> <p>FR 2107-M2 \oplus 3NC</p> <p>FR 2207-M2 \oplus 2NO+1NC</p> <p>FR E107-M2 1NO-1NC</p>	

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at www.pizzato.com



Contact type	External gasket		External gasket		Secured only by means of threaded head in vertical position	
<ul style="list-style-type: none"> R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close △ = electronic, PNP 						
Contact block						
2 R	FR 2A7-M2	2x(1NO-1NC)	FR 208-M2	2x(1NO-1NC)	FR 210-M2	2x(1NO-1NC)
5 R	FR 5A7-M2	1NO+1NC	FR 508-M2	1NO+1NC	FR 510-M2	1NO+1NC
6 L	FR 6A7-M2	1NO+1NC	FR 608-M2	1NO+1NC	FR 610-M2	1NO+1NC
7 LO	FR 7A7-M2	1NO+1NC	FR 708-M2	1NO+1NC	FR 710-M2	1NO+1NC
9 L	FR 9A7-M2	2NC	FR 908-M2	2NC	FR 910-M2	2NC
10 L	FR 10A7-M2	2NO	FR 1008-M2	2NO	FR 1010-M2	2NO
11 R	FR 11A7-M2	2NC	FR 1108-M2	2NC	FR 1110-M2	2NC
12 R	FR 12A7-M2	2NO	FR 1208-M2	2NO	FR 1210-M2	2NO
13 LV	FR 13A7-M2	2NC	FR 1308-M2	2NC	FR 1310-M2	2NC
14 LS	FR 14A7-M2	2NC	FR 1408-M2	2NC	FR 1410-M2	2NC
15 LS	FR 15A7-M2	2NO	FR 1508-M2	2NO	FR 1510-M2	2NO
18 LA	FR 18A7-M2	1NO+1NC	FR 1808-M2	1NO+1NC	FR 1810-M2	1NO+1NC
20 L	FR 20A7-M2	1NO+2NC	FR 2008-M2	1NO+2NC	FR 2010-M2	1NO+2NC
21 L	FR 21A7-M2	3NC	FR 2108-M2	3NC	FR 2110-M2	3NC
22 L	FR 22A7-M2	2NO+1NC	FR 2208-M2	2NO+1NC	FR 2210-M2	2NO+1NC
E1 △	FR E1A7-M2	1NO-1NC	FR E108-M2	1NO-1NC	FR E110-M2	1NO-1NC
Max. speed	page 231 - type 3		page 231 - type 4		page 231 - type 4	
Actuating force	3 N (25 N \rightarrow)		8 N (25 N \rightarrow)		8 N (25 N \rightarrow)	
Travel diagrams	page 232 - group 3		page 232 - group 1		page 232 - group 1	

Contact type	Roller, Ø 11 mm, technopolymer		Steel roller, Ø 12 mm, with self-lubrication With 316L stainless steel roller on request	
<ul style="list-style-type: none"> R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close △ = electronic, PNP 				
Contact block				
2 R	FR 213-M2	2x(1NO-1NC)	FR 214-M2	2x(1NO-1NC)
5 R	FR 513-M2	1NO+1NC	FR 514-M2	1NO+1NC
6 L	FR 613-M2	1NO+1NC	FR 614-M2	1NO+1NC
7 LO	FR 713-M2	1NO+1NC	FR 714-M2	1NO+1NC
9 L	FR 913-M2	2NC	FR 914-M2	2NC
10 L	FR 1013-M2	2NO	FR 1014-M2	2NO
11 R	FR 1113-M2	2NC	FR 1114-M2	2NC
12 R	FR 1213-M2	2NO	FR 1214-M2	2NO
13 LV	FR 1313-M2	2NC	FR 1314-M2	2NC
14 LS	FR 1413-M2	2NC	FR 1414-M2	2NC
15 LS	FR 1513-M2	2NO	FR 1514-M2	2NO
18 LA	FR 1813-M2	1NO+1NC	FR 1814-M2	1NO+1NC
20 L	FR 2013-M2	1NO+2NC	FR 2014-M2	1NO+2NC
21 L	FR 2113-M2	3NC	FR 2114-M2	3NC
22 L	FR 2213-M2	2NO+1NC	FR 2214-M2	2NO+1NC
E1 △	FR E113-M2	1NO-1NC	FR E114-M2	1NO-1NC
Max. speed	page 231 - type 2		page 231 - type 4	
Actuating force	8 N (25 N \rightarrow)		8 N (25 N \rightarrow)	
Travel diagrams	page 232 - group 1		page 232 - group 1	





All values in the drawings are in mm

Accessories See page 207

\rightarrow The 2D and 3D files are available at www.pizzato.com

FR series position switches





- Contact type
- R** = snap action
 - L** = slow action
 - LO** = slow action, make before break
 - LS** = slow action, shifted
 - LV** = slow action, shifted and spaced
 - LI** = slow action, independent
 - LA** = slow action, close
 - △** = electronic, PNP

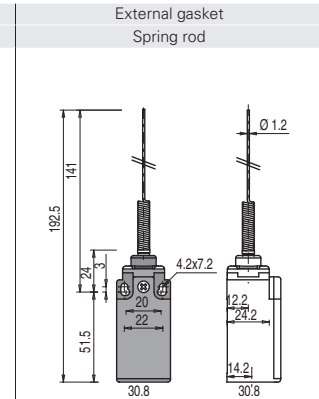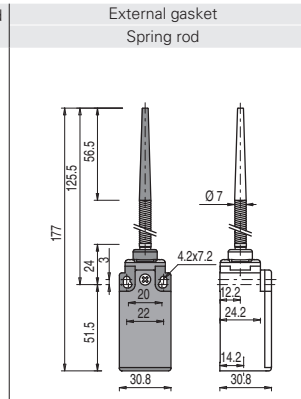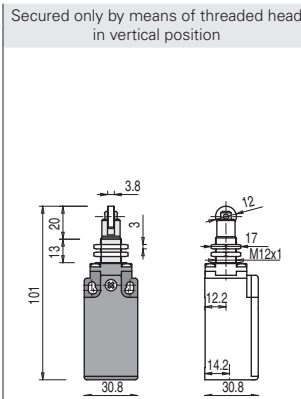

Contact block

2	R	FR 216-M2	2x(1NO-1NC)	FR 217-M2	2x(1NO-1NC)	FR 220-M2	2x(1NO-1NC)	FR 221-M2	2x(1NO-1NC)
5	R	FR 516-M2	⊕ 1NO+1NC	FR 517-M2	⊕ 1NO+1NC	FR 520-M2	1NO+1NC	FR 521-M2	1NO+1NC
6	L	FR 616-M2	⊕ 1NO+1NC	FR 617-M2	⊕ 1NO+1NC	/	/	/	/
7	LO	FR 716-M2	⊕ 1NO+1NC	FR 717-M2	⊕ 1NO+1NC	/	/	/	/
9	L	FR 916-M2	⊕ 2NC	FR 917-M2	⊕ 2NC	/	/	/	/
10	L	FR 1016-M2	2NO	FR 1017-M2	2NO	FR 1020-M2	2NO	FR 1021-M2	2NO
11	R	FR 1116-M2	⊕ 2NC	FR 1117-M2	⊕ 2NC	/	/	/	/
12	R	FR 1216-M2	2NO	FR 1217-M2	2NO	FR 1220-M2	2NO	FR 1221-M2	2NO
13	LV	FR 1316-M2	⊕ 2NC	FR 1317-M2	⊕ 2NC	/	/	/	/
14	LS	FR 1416-M2	⊕ 2NC	FR 1417-M2	⊕ 2NC	/	/	/	/
15	LS	FR 1516-M2	2NO	FR 1517-M2	2NO	/	/	/	/
18	LA	FR 1816-M2	⊕ 1NO+1NC	FR 1817-M2	⊕ 1NO+1NC	FR 1820-M2	1NO+1NC	FR 1821-M2	1NO+1NC
20	L	FR 2016-M2	⊕ 1NO+2NC	FR 2017-M2	⊕ 1NO+2NC	FR 2020-M2	1NO+2NC	FR 2021-M2	1NO+2NC
21	L	FR 2116-M2	⊕ 3NC	FR 2117-M2	⊕ 3NC	FR 2120-M2	3NC	FR 2121-M2	3NC
22	L	FR 2216-M2	⊕ 2NO+1NC	FR 2217-M2	⊕ 2NO+1NC	FR 2220-M2	2NO+1NC	FR 2221-M2	2NO+1NC
E1	△	FR E116-M2	1NO-1NC	FR E117-M2	1NO-1NC	FR E120-M2	1NO-1NC	FR E121-M2	1NO-1NC
Max. speed		page 231 - type 2		page 231 - type 2		1 m/s		1 m/s	
Actuating force		8 N (25 N ⊕)		8 N (25 N ⊕)		0.07 Nm		0.07 Nm	
Travel diagrams		page 232 - group 1		page 232 - group 1		page 232 - group 4		page 232 - group 4	

- Contact type
- R** = snap action
 - L** = slow action
 - LO** = slow action, make before break
 - LS** = slow action, shifted
 - LV** = slow action, shifted and spaced
 - LI** = slow action, independent
 - LA** = slow action, close
 - △** = electronic, PNP



Contact block

2	R	FR 222-M2	2x(1NO-1NC)	FR 225-M2	2x(1NO-1NC)	FR 230-M2	2x(1NO-1NC)	FR 231-M2	2x(1NO-1NC)
5	R	/	/	FR 525-M2	1NO+1NC	FR 530-M2	⊕ 1NO+1NC	FR 531-M2	⊕ 1NO+1NC
6	L	/	/	/	/	FR 630-M2	⊕ 1NO+1NC	FR 631-M2	⊕ 1NO+1NC
7	LO	/	/	/	/	FR 730-M2	⊕ 1NO+1NC	FR 731-M2	⊕ 1NO+1NC
9	L	/	/	/	/	FR 930-M2	⊕ 2NC	FR 931-M2	⊕ 2NC
10	L	FR 1022-M2	2NO	FR 1025-M2	2NO	FR 1030-M2	2NO	FR 1031-M2	2NO
11	R	/	/	/	/	FR 1130-M2	⊕ 2NC	FR 1131-M2	⊕ 2NC
12	R	FR 1222-M2	2NO	FR 1225-M2	2NO	FR 1230-M2	2NO	FR 1231-M2	2NO
13	LV	/	/	/	/	FR 1330-M2	⊕ 2NC	FR 1331-M2	⊕ 2NC
14	LS	/	/	/	/	FR 1430-M2	⊕ 2NC	FR 1431-M2	⊕ 2NC
15	LS	/	/	/	/	FR 1530-M2	2NO	FR 1531-M2	2NO
16	LI	/	/	/	/	FR 1630-M2	⊕ 2NC	FR 1631-M2	⊕ 2NC
18	LA	FR 1822-M2	⊕ 1NO+1NC	FR 1825-M2	1NO+1NC	FR 1830-M2	⊕ 1NO+1NC	FR 1831-M2	⊕ 1NO+1NC
20	L	FR 2022-M2	⊕ 1NO+2NC	FR 2025-M2	1NO+2NC	FR 2030-M2	⊕ 1NO+2NC	FR 2031-M2	⊕ 1NO+2NC
21	L	FR 2122-M2	⊕ 3NC	FR 2125-M2	3NC	FR 2130-M2	⊕ 3NC	FR 2131-M2	⊕ 3NC
22	L	FR 2222-M2	⊕ 2NO+1NC	FR 2225-M2	2NO+1NC	FR 2230-M2	⊕ 2NO+1NC	FR 2231-M2	⊕ 2NO+1NC
E1	△	FR E122-M2	1NO-1NC	FR E125-M2	1NO-1NC	FR E130-M2	1NO-1NC	FR E131-M2	1NO-1NC
Max. speed		1 m/s		1 m/s		page 231 - type 1		page 231 - type 1	
Actuating force		0.12 Nm (0.25 Nm ⊕)		0.12 Nm		0.06 Nm (0.25 Nm ⊕)		0.06 Nm (0.25 Nm ⊕)	
Travel diagrams		page 232 - group 4		page 232 - group 4		page 232 - group 5		page 232 - group 5	

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at www.pizzato.com



Contact type	Square rod, 3x3 mm	Spring rod	Round rod, Ø 3 mm, stainless steel	Other rollers available. See page 66
<ul style="list-style-type: none"> R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close Λ = electronic, PNP 				
Contact block				
2	R FR 233-M2 2x(1NO-1NC)	FR 234-M2 2x(1NO-1NC)	FR 250-M2 2x(1NO-1NC)	FR 251-M2 2x(1NO-1NC)
5	R FR 533-M2 1NO+1NC	FR 534-M2 1NO+1NC	FR 550-M2 1NO+1NC	FR 551-M2 (⊕) 1NO+1NC
6	L FR 633-M2 1NO+1NC	FR 634-M2 1NO+1NC	FR 650-M2 1NO+1NC	FR 651-M2 (⊕) 1NO+1NC
7	LO FR 733-M2 1NO+1NC	FR 734-M2 1NO+1NC	FR 750-M2 1NO+1NC	FR 751-M2 (⊕) 1NO+1NC
9	L FR 933-M2 2NC	FR 934-M2 2NC	FR 950-M2 2NC	FR 951-M2 (⊕) 2NC
10	L FR 1033-M2 2NO	FR 1034-M2 2NO	FR 1050-M2 2NO	FR 1051-M2 2NO
11	R FR 1133-M2 2NC	FR 1134-M2 2NC	FR 1150-M2 2NC	FR 1151-M2 (⊕) 2NC
12	R FR 1233-M2 2NO	FR 1234-M2 2NO	FR 1250-M2 2NO	FR 1251-M2 2NO
13	LV FR 1333-M2 2NC	FR 1334-M2 2NC	FR 1350-M2 2NC	FR 1351-M2 (⊕) 2NC
14	LS FR 1433-M2 2NC	FR 1434-M2 2NC	FR 1450-M2 2NC	FR 1451-M2 (⊕) 2NC
15	LS FR 1533-M2 2NO	FR 1534-M2 2NO	FR 1550-M2 2NO	FR 1551-M2 2NO
16	LI FR 1633-M2 2NC	FR 1634-M2 2NC	FR 1650-M2 2NC	FR 1651-M2 (⊕) 2NC
18	LA FR 1833-M2 1NO+1NC	FR 1834-M2 1NO+1NC	FR 1850-M2 1NO+1NC	FR 1851-M2 (⊕) 1NO+1NC
20	L FR 2033-M2 1NO+2NC	FR 2034-M2 1NO+2NC	FR 2050-M2 1NO+2NC	FR 2051-M2 (⊕) 1NO+2NC
21	L FR 2133-M2 3NC	FR 2134-M2 3NC	FR 2150-M2 3NC	FR 2151-M2 (⊕) 3NC
22	L FR 2233-M2 2NO+1NC	FR 2234-M2 2NO+1NC	FR 2250-M2 2NO+1NC	FR 2251-M2 (⊕) 2NO+1NC
E1	Λ FR E133-M2 1NO-1NC	FR E134-M2 1NO-1NC	FR E150-M2 1NO-1NC	FR E151-M2 1NO-1NC
Max. speed	1.5 m/s	1.5 m/s	1.5 m/s	page 231 - type 1
Actuating force	0.06 Nm	0.06 Nm	0.06 Nm	0.06 Nm (0.25 Nm ⊕)
Travel diagrams	page 232 - group 5	page 232 - group 5	page 232 - group 5	page 232 - group 5

Contact type	Other rollers available. See page 66	Porcelain roller	Other rollers available. See page 66	Other rollers available. See page 66
<ul style="list-style-type: none"> R = snap action L = slow action LO = slow action, make before break LS = slow action, shifted LV = slow action, shifted and spaced LI = slow action, independent LA = slow action, close Λ = electronic, PNP 				
Contact block				
2	R FR 252-M2 2x(1NO-1NC)	FR 253-E0M2 2x(1NO-1NC)	FR 254-M2 2x(1NO-1NC)	FR 255-M2 2x(1NO-1NC)
5	R FR 552-M2 (⊕) 1NO+1NC	FR 553-E0M2V9 (⊕) 1NO+1NC	FR 554-M2 (⊕) 1NO+1NC	FR 555-M2 (⊕) (1) 1NO+1NC
6	L FR 652-M2 (⊕) 1NO+1NC	FR 653-E0M2V9 (⊕) 1NO+1NC	FR 654-M2 (⊕) 1NO+1NC	FR 655-M2 (⊕) (1) 1NO+1NC
7	LO FR 752-M2 (⊕) 1NO+1NC	FR 753-E0M2V9 (⊕) 1NO+1NC	FR 754-M2 (⊕) 1NO+1NC	FR 755-M2 (⊕) (1) 1NO+1NC
9	L FR 952-M2 (⊕) 2NC	FR 953-E0M2V9 (⊕) 2NC	FR 954-M2 (⊕) 2NC	FR 955-M2 (⊕) (1) 2NC
10	L FR 1052-M2 2NO	FR 1053-E0M2V9 2NO	FR 1054-M2 2NO	FR 1055-M2 2NO
11	R FR 1152-M2 (⊕) 2NC	/	FR 1154-M2 (⊕) 2NC	FR 1155-M2 (⊕) (1) 2NC
12	R FR 1252-M2 2NO	FR 1253-E0M2V9 2NO	FR 1254-M2 2NO	FR 1255-M2 2NO
13	LV FR 1352-M2 (⊕) 2NC	FR 1353-E0M2V9 (⊕) 2NC	FR 1354-M2 (⊕) 2NC	FR 1355-M2 (⊕) (1) 2NC
14	LS FR 1452-M2 (⊕) 2NC	FR 1453-E0M2V9 (⊕) 2NC	FR 1454-M2 (⊕) 2NC	FR 1455-M2 (⊕) (1) 2NC
15	LS FR 1552-M2 2NO	FR 1553-E0M2V9 2NO	FR 1554-M2 2NO	FR 1555-M2 2NO
16	LI FR 1652-M2 (⊕) 2NC	/	FR 1654-M2 (⊕) 2NC	FR 1655-M2 (⊕) (1) 2NC
18	LA FR 1852-M2 (⊕) 1NO+1NC	FR 1853-E0M2V9 (⊕) 1NO+1NC	FR 1854-M2 (⊕) 1NO+1NC	FR 1855-M2 (⊕) (1) 1NO+1NC
20	L FR 2052-M2 (⊕) 1NO+2NC	FR 2053-E0M2V9 (⊕) 1NO+2NC	FR 2054-M2 (⊕) 1NO+2NC	FR 2055-M2 (⊕) (1) 1NO+2NC
21	L FR 2152-M2 (⊕) 3NC	FR 2153-E0M2V9 (⊕) 3NC	FR 2154-M2 (⊕) 3NC	FR 2155-M2 (⊕) (1) 3NC
22	L FR 2252-M2 (⊕) 2NO+1NC	FR 2253-E0M2V9 (⊕) 2NO+1NC	FR 2254-M2 (⊕) 2NO+1NC	FR 2255-M2 (⊕) (1) 2NO+1NC
E1	Λ FR E152-M2 1NO-1NC	FR E153-E0M2V9 1NO-1NC	FR E154-M2 1NO-1NC	FR E155-M2 1NO-1NC
Max. speed	page 231 - type 1	0.5 m/s	page 231 - type 1	page 231 - type 1
Actuating force	0.06 Nm (0.25 Nm ⊕)	0.03 Nm (0.25 Nm ⊕)	0.06 Nm (0.25 Nm ⊕)	0.06 Nm (0.25 Nm ⊕)
Travel diagrams	page 232 - group 5	page 232 - group 6	page 232 - group 5	page 232 - group 5

(1) Positive opening only with actuator set to max. See page 66.

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at www.pizzato.com

FR series position switches

- Contact type
- R** = snap action
 - L** = slow action
 - LO** = slow action, make before break
 - LS** = slow action, shifted
 - LV** = slow action, shifted and spaced
 - LI** = slow action, independent
 - LA** = slow action, close
 - △** = electronic, PNP
- Contact block

		Other rollers available. See page 66		Other rollers available. See page 66		Glass fibre rod		Rope switch for signalling	
2	R FR 256-M2	2x(1NO-1NC)	FR 257-M2	2x(1NO-1NC)	FR 269-M2	2x(1NO-1NC)	FR 276-M2	2x(1NO-1NC)	
5	R FR 556-M2	⊕ 1NO+1NC	FR 557-M2	⊕ 1NO+1NC	FR 569-M2	1NO+1NC	FR 576-M2	1NO+1NC	
6	L FR 656-M2	⊕ 1NO+1NC	FR 657-M2	⊕ 1NO+1NC	FR 669-M2	1NO+1NC	FR 676-M2	1NO+1NC	
7	LO FR 756-M2	⊕ 1NO+1NC	FR 757-M2	⊕ 1NO+1NC	FR 769-M2	1NO+1NC	FR 776-M2	1NO+1NC	
9	L FR 956-M2	⊕ 2NC	FR 957-M2	⊕ 2NC	FR 969-M2	2NC	FR 976-M2	2NO	
10	L FR 1056-M2	2NO	FR 1057-M2	2NO	FR 1069-M2	2NO	FR 1076-M2	2NC	
11	R FR 1156-M2	⊕ 2NC	FR 1157-M2	⊕ 2NC	FR 1169-M2	2NC	FR 1176-M2	2NO	
12	R FR 1256-M2	2NO	FR 1257-M2	2NO	FR 1269-M2	2NO	FR 1276-M2	2NC	
13	LV FR 1356-M2	⊕ 2NC	FR 1357-M2	⊕ 2NC	FR 1369-M2	2NC	FR 1376-M2	2NO	
14	LS FR 1456-M2	⊕ 2NC	FR 1457-M2	⊕ 2NC	FR 1469-M2	2NC	FR 1476-M2	2NO	
15	LS FR 1556-M2	2NO	FR 1557-M2	2NO	FR 1569-M2	2NO	FR 1576-M2	2NC	
16	LI FR 1656-M2	⊕ 2NC	FR 1657-M2	⊕ 2NC	FR 1669-M2	2NC		/	
18	LA FR 1856-M2	⊕ 1NO+1NC	FR 1857-M2	⊕ 1NO+1NC	FR 1869-M2	1NO+1NC	FR 1876-M2	1NO+1NC	
20	L FR 2056-M2	⊕ 1NO+2NC	FR 2057-M2	⊕ 1NO+2NC	FR 2069-M2	1NO+2NC	FR 2076-M2	2NO+1NC	
21	L FR 2156-M2	⊕ 3NC	FR 2157-M2	⊕ 3NC	FR 2169-M2	3NC	FR 2176-M2	3NO	
22	L FR 2256-M2	⊕ 2NO+1NC	FR 2257-M2	⊕ 2NO+1NC	FR 2269-M2	2NO+1NC	FR 2276-M2	1NO+2NC	
E1	△ FR E156-M2	1NO-1NC	FR E157-M2	1NO-1NC	FR E169-M2	1NO-1NC		/	
Max. speed	page 231 - type 1		page 231 - type 1		1.5 m/s		0.5 m/s		
Actuating force	0.06 Nm (0.25 Nm ⊕)		0.06 Nm (0.25 Nm ⊕)		0.06 Nm		initial 20 N - final 40 N		
Travel diagrams	page 232 - group 5		page 232 - group 5		page 232 - group 5		page 232 - group 7		

FR series position switches with reset



The majority of switches can be equipped with a reset device (option W3) which enables the simultaneous actuation of actuator and contact block. The device is a module that is mounted between the body and the head of the switch that can be rotated independently from the head. The reset device has the following advantages:

- can be integrated into the majority of standard actuator heads;
- contact blocks with snap action are no more necessary because the tripping movement is executed by the reset device itself;
- can be rotated independently from the head ensuring maximum flexibility during installation;
- can be delivered with two different actuating forces: standard and increased for vibration applications;
- mechanical endurance: 1 million operating cycles.

- Contact type
- R** = snap action
 - L** = slow action

		With steel roller with self-lubrication or 316L stainless steel on request		With steel roller with self-lubrication or 316L stainless steel on request				
2	R FR 201-W3M2	2x(1NO-1NC)	FR 202-W3M2	2x(1NO-1NC)	FR 205-W3M2	2x(1NO-1NC)	FR 207-W3M2	2x(1NO-1NC)
6	L FR 601-W3M2	⊕ 1NO+1NC	FR 602-W3M2	⊕ 1NO+1NC	FR 605-W3M2	⊕ 1NO+1NC	FR 607-W3M2	⊕ 1NO+1NC
9	L FR 901-W3M2	⊕ 2NC	FR 902-W3M2	⊕ 2NC	FR 905-W3M2	⊕ 2NC	FR 907-W3M2	⊕ 2NC
10	L FR 1001-W3M2	2NO	FR 1002-W3M2	2NO	FR 1005-W3M2	2NO	FR 1007-W3M2	2NO
20	L FR 2001-W3M2	⊕ 1NO+2NC	FR 2002-W3M2	⊕ 1NO+2NC	FR 2005-W3M2	⊕ 1NO+2NC	FR 2007-W3M2	⊕ 1NO+2NC
21	L FR 2101-W3M2	⊕ 3NC	FR 2102-W3M2	⊕ 3NC	FR 2105-W3M2	⊕ 3NC	FR 2107-W3M2	⊕ 3NC
22	L FR 2201-W3M2	⊕ 2NO+1NC	FR 2202-W3M2	⊕ 2NO+1NC	FR 2205-W3M2	⊕ 2NO+1NC	FR 2207-W3M2	⊕ 2NO+1NC
Max. speed	page 231 - type 4		page 231 - type 3		page 231 - type 3		page 231 - type 3	
Actuating force	4.5 N (25 N ⊕)		4 N (25 N ⊕)		4 N (25 N ⊕)		2.5 N (25 N ⊕)	
Travel diagrams	page 231 - group 1		page 231 - group 2		page 231 - group 2		page 231 - group 3	

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at www.pizzato.com

Contact type	With Ø 12 mm steel roller with self-lubrication or 316L stainless steel on request		With Ø 20 mm steel roller with self-lubrication or 316L stainless steel on request		Other rollers available. See page 66		Other rollers available. See page 66	
	R = snap action L = slow action							
Contact block								
	2 R FR 215-W3M2 2x(1NO-1NC)	6 L FR 615-W3M2 1NO+1NC	20 L FR 2015-W3M2 1NO+2NC	22 L FR 2215-W3M2 2NO+1NC	21 L FR 2130-W3M2 3NC	22 L FR 2230-W3M2 2NO+1NC	21 L FR 2131-W3M2 3NC	22 L FR 2231-W3M2 2NO+1NC
Max. speed	page 231 - type 2		page 231 - type 1		page 231 - type 1		page 231 - type 1	
Actuating force	4.5 N (25 N \ominus)		0.07 Nm (0.25 Nm \ominus)		0.07 Nm (0.25 Nm \ominus)		0.07 Nm (0.25 Nm \ominus)	
Travel diagrams	page 231 - group 1		page 231 - group 4		page 231 - group 4		page 231 - group 4	

Contact type	Other rollers available. See page 66		Other rollers available. See page 66		Other rollers available. See page 66		Other rollers available. See page 66	
	R = snap action L = slow action							
Contact block								
	2 R FR 252-W3M2 2x(1NO-1NC)	6 L FR 652-W3M2 1NO+1NC	20 L FR 2052-W3M2 1NO+2NC	22 L FR 2252-W3M2 2NO+1NC	21 L FR 2152-W3M2 3NC	22 L FR 2252-W3M2 2NO+1NC	21 L FR 2157-W3M2 3NC	22 L FR 2257-W3M2 2NO+1NC
Max. speed	page 231 - type 1		page 231 - type 1		page 231 - type 1		page 231 - type 1	
Actuating force	0.07 Nm (0.25 Nm \ominus)		0.07 Nm (0.25 Nm \ominus)		0.07 Nm (0.25 Nm \ominus)		0.07 Nm (0.25 Nm \ominus)	
Travel diagrams	page 231 - group 4		page 231 - group 4		page 231 - group 4		page 231 - group 4	

Increased actuating force



The switch can be delivered with increased actuating force (option W4). Ideal for vibration applications.


Actuators	Actuating force
01, 14, 15, 16	7 N
02, 05	6 N
07	3.5 N
30 ... 57	0.08 Nm

To order the switch with reset and increased actuating force, replace the -W3 option with -W4 in the order code.


Example: FR 601-W3M2 → FR 601-W4M2

Position switches with swivelling lever without actuator

- Contact type
- R** = snap action
 - L** = slow action
 - LO** = slow action, make before break
 - LS** = slow action, shifted
 - LV** = slow action, shifted and spaced
 - LI** = slow action, independent
 - LA** = slow action, close
 - E** = electronic, PNP
- Contact block



With manual reset knob



IMPORTANT

For safety applications: join only switches and actuators marked with symbol \ominus next to the product code. For more information about safety applications see details on page 225.

2	R	FR 238-M2	2x(1NO-1NC)	FR 238-W3M2	2x(1NO-1NC)
5	R	FR 538-M2	1NO+1NC	/	
6	L	FR 638-M2	1NO+1NC	FR 638-W3M2	1NO+1NC
7	LO	FR 738-M2	1NO+1NC	/	
9	L	FR 938-M2	2NC	FR 938-W3M2	2NC
10	L	FR 1038-M2	2NO	FR 1038-W3M2	2NO
11	R	FR 1138-M2	2NC	/	
12	R	FR 1238-M2	2NO	/	
13	LV	FR 1338-M2	2NC	/	
14	LS	FR 1438-M2	2NC	/	
15	LS	FR 1538-M2	2NO	/	
16	LI	FR 1638-M2	2NC	/	
18	LA	FR 1838-M2	1NO+1NC	/	
20	L	FR 2038-M2	1NO+2NC	FR 2038-W3M2	1NO+2NC
21	L	FR 2138-M2	3NC	FR 2138-W3M2	3NC
22	L	FR 2238-M2	2NO+1NC	FR 2238-W3M2	2NO+1NC
E1	E	FR E138-M2	1NO-1NC	/	
Actuating force		0.06 Nm (0.25 Nm \ominus)		0.07 Nm (0.25 Nm \ominus)	
Travel diagrams		page 232 - group 5		page 231 - group 4	

Separate actuators

IMPORTANT: These separate actuators can be used only with items of the FR, FM, FX, FZ and FK series.

Technopolymer roller Ø 18 mm	Technopolymer roller Ø 18 mm	Adjustable square rod, 3x3x125 mm	Spring rod with plastic tip	Adjustable round rod Ø 3x125 mm	Technopolymer roller Ø 20 mm	
VF LE30 \ominus	VF LE31 \ominus	VF LE33	VF LE34	VF LE50	VF LE51 \ominus	
Technopolymer roller Ø 20 mm	Porcelain roller	Technopolymer roller Ø 20 mm	Adjustable actuator with technopolymer roller	Adjustable safety actuator with technopolymer roller	Technopolymer roller Ø 20 mm	Adjustable glass fibre rod
VF LE52 \ominus	VF LE53 \ominus (2)	VF LE54 \ominus	VF LE55 \ominus (1)	VF LE56 \ominus	VF LE57 \ominus	VF LE69

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at www.pizzato.com



Special separate actuators

IMPORTANT: These separate actuators can be used only with items of the FR, FM, FX, FZ and FK series.

Steel rollers, Ø 20 mm, with self-lubrication

VF LE31-R24 (4)	VF LE51-R24 (4)	VF LE52-R24 (4)	VF LE54-R24 (4)	VF LE55-R24 (1) (1)	VF LE56-R24 (4)	VF LE57-R24 (4)

Note: To order with 316L stainless steel roller: replace R24 with R41 in the order numbers.

Technopolymer rollers, Ø 35 mm

VF LE31-R25 (4) (4)	VF LE51-R25 (4) (4)	VF LE52-R25 (4)	VF LE54-R25 (4) (4)	VF LE55-R25 (1) (1)	VF LE56-R25 (4)	VF LE57-R25 (4)

Rubber rollers, Ø 40 mm

VF LE31-R5 (4) (4)	VF LE51-R5 (4) (4)	VF LE52-R5 (4)	VF LE54-R5 (4) (4)	VF LE55-R5 (1) (1)	VF LE56-R5 (4)	VF LE57-R5 (4) (4)


Rubber rollers, Ø 50 mm

VF LE51-R26 (4) (4)	VF LE52-R26 (4) (4)	VF LE54-R26 (4) (4)	VF LE55-R26 (1) (1)	VF LE56-R26 (4)	VF LE57-R26 (4) (4)

Protruding rubber rollers, Ø 50 mm

VF LE55-R27 (1) (1)	VF LE56-R27 (4) (4)

- (1) Lever VF LE55 can only be used in safety applications if adjusted to its max. length, as shown in the figure to the right. If an adjustable lever is required for safety applications, use the VF LE56 adjustable safety lever.
- (2) The position switch obtained by assembling switch FR •38-M2 (e.g. FR 538-M2, FR 638-M2, ...) with actuator VF LE53 will not present the same travel diagrams and actuating forces as switch FR •53-E0M2V9 (e.g. FR 553-E0M2V9, FR 653-E0M2V9, ...)
- (4) The actuator cannot be rotated to the inside because it will hit the switch head upon actuation.



All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at www.pizzato.com